




## HOLSET FRAME SIZES

	HX20	HX25-27	HE200	HX30	HE300	HX35	HX40	HE400	HX50	HX55	HE500	HX60	HX82-83
For Engine Capacity (litres per turbo)	Up to 5	Up to 5	Up to 7	Up to 7	Up to 10	Up to 10	Up to 12	Up to 15	Up to 15	Up to 16	Up to 16	Up to 19	Up to 25
Output Range (kW)	14-60	20-120	75-120	75-120	90-240	90-240	150-280	150-280	220-370	220-420	220-420	240-450	375-840
Airflow (kg/s)	0.2	0.23	0.33	0.33	0.46	0.46	0.53	0.54	0.75	0.75	0.75	0.95	1.5
<b>Dimensions:</b>													
Length (mm)	176	254	254	222	250	224	231	319	249	259	278	280	332
Width (mm)	160	226	226	217	240	250	250	319	275	275	278	285	318
Height (mm)	130	148	148	154	220	169	169	230	225	225	267	237	300
Smallest Mass (kg)	2.8	4	4	8	9	9	11	11	16	18	18	18	35
Largest Mass (kg)	2.8	5	5	10	17	11	14	23	19	21	33	22	55
<b>Options:</b>													
Holset VGT™					•		•	•		•	•		
Wastegate	•	•	•	•	•	•	•	•	•	•	•	•	•
Ti Impeller					•	•	•	•		•	•	•	•
Machined From Solid Impeller			•	•	•	•	•	•	•	•	•	•	•
Semi-Solid Moulded Impeller								•			•		

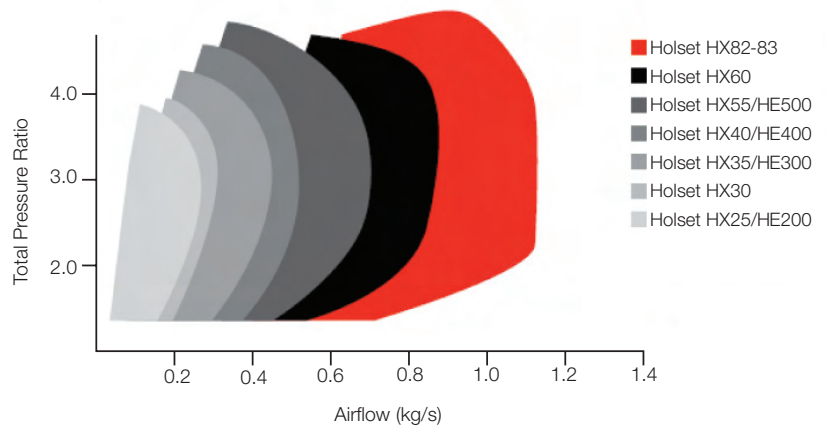

Cummins Turbo Technologies  
 8550 Palmetto Commerce Parkway  
 Ladson, Charleston, South Carolina 29420  
 USA  
 Tel +1 843 695 2181  
 Fax +1 843 695 2190  
 turbo.sales@cummins.com

Cummins Turbo Technologies  
 Rua Jati, 310  
 Guarulhos - SP  
 07180 - 900 Brazil  
 Tel +55 11 2186 4791/4790  
 Fax +55 11 2186 4181  
 holset.brasil@cummins.com

Wuxi Cummins Turbo Technologies  
 28 Xinxi Road  
 Wuxi National High and New Technology Development Zone  
 Wuxi, Jiangsu 214028 China  
 Tel +86 510 85200800  
 Fax +86 510 85200899  
 turbo.mail@cummins.com